

TRB SERIES

MANUAL TRANSFER PANELS

The **Panel/Link TRB** offers circuit breaker combinations of 30A - 125A utility and 30A - 125A generator. Interlinked circuit breakers keep the generator isolated from the utility at all times, even with the deadfront removed. The TRB features a heavy-duty copper bus. Suitable for service entrance, the TRB may be used as a main panel or a sub-panel. The TRB is available in indoor and outdoor enclosures and has provision for 4/8 branch circuits.



30AMP - 125AMP



30AMP - 125AMP



TRB - Indoor



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TRB0303A	30	30	Yes	Yes	8-15181-01439-1
TRB0303C	30	30	No	Yes	8-15181-01440-7
TRB0303D	30	30	No	No	8-15181-01441-4
TRB0603A	60	30	Yes	Yes	8-15181-01442-1
TRB0603C	60	30	No	Yes	8-15181-01443-8
TRB0603D	60	30	No	No	8-15181-01445-2
TRB0605A	60	50	Yes	Yes	8-15181-01447-6
TRB0605C	60	50	No	Yes	8-15181-01448-3
TRB0605D	60	50	No	No	8-15181-01450-6
TRB0606C	60	60	No	Yes	8-15181-01452-0
TRB0606D	60	60	No	No	8-15181-01454-4
TRB1003A	100	30	Yes	Yes	8-51890-00046-1
TRB1003C	100	30	No	Yes	8-15181-01456-8
TRB1003D	100	30	No	No	8-15181-01458-2
TRB1005A	100	50	Yes	Yes	8-15181-01460-5
TRB1005C	100	50	No	Yes	8-15181-01049-2
TRB1005D	100	50	No	No	8-15181-01462-9
TRB1006C	100	60	No	Yes	8-15181-01464-3
TRB1006D	100	60	No	No	8-51890-00094-2
TRB1010D	100	100	No	No	8-15181-01467-4
TRB1203D	125	30	No	No	8-15181-01719-4
TRB1205D	125	50	No	No	8-15181-01720-0
TRB1206D	125	60	No	No	8-15181-01721-7
TRB1210D	125	100	No	No	8-15181-01722-4
TRB1212D	125	125	No	No	8-15181-01723-1

Dimensions: 14.75"h x 12.38"w x 3.88"d Shipping Weight: 15lbs.

2-POLE PANEL/LINK

TRANSFER PANELS




TRB - Outdoor



NEMA 3R
Rated


Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TRB0603CR	60	30	No	Yes	8-15181-01444-5
TRB0603DR	60	30	No	No	8-15181-01446-9
TRB0605CR	60	50	No	Yes	8-15181-01449-0
TRB0605DR	60	50	No	No	8-15181-01451-3
TRB0606CR	60	60	No	Yes	8-15181-01453-7
TRB0606DR	60	60	No	No	8-15181-01455-1
TRB1003CR	100	30	No	Yes	8-15181-01457-5
TRB1003DR	100	30	No	No	8-15181-01459-9
TRB1005CR	100	50	No	Yes	8-15181-01461-2
TRB1005DR	100	50	No	No	8-15181-01463-6
TRB1006CR	100	60	No	Yes	8-15181-01465-0
TRB1006DR	100	60	No	No	8-15181-01466-7
TRB1010DR	100	100	No	No	8-15181-01468-1
TRB1203DR	125	30	No	No	815181017248
TRB1205DR	125	50	No	No	815181017255
TRB1206DR	125	60	No	No	815181017262
TRB1210DR	125	100	No	No	815181017279
TRB1212DR	125	125	No	No	815181017286

TRB Series Wiring Diagram

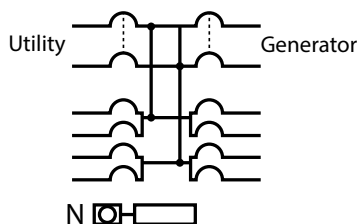


Dimensions: 14.75"h x 12.13"w x 4.25"d Shipping Weight: 16lbs.

TRB Series Knockout Patterns



Indoor TRB Series

- A. 4 K.O.s for .25" Conduit
- B. 2 K.O.s for .38", .5", .75", 1", 1.25" Conduit
- C. 10 K.O.s for .5", .75", 1" Conduit
- D. 52 K.O.s for .5" Conduit
- E. 12 K.O.s for .38", .5", .75" Conduit
- F. 10 K.O.s for 1", 1.25", 2", 2.5" Conduit
- G. 3 K.O.s for 1.75" Ground Bar Mounting
- H. Mounting Hole (4 places)



Outdoor TRB Series

- A. HS Type Hub Opening (Max. 2" Conduit)
- B. 4 K.O.s for 1", 1.25", 1.5" Conduit
- C. 8 K.O.s for .5" Conduit
- D. 1 K.O. .25"
- E. 2 K.O.s for .5", .75" Conduit
- F. 3 K.O.s for .5", .75", 1" Conduit
- G. Embossed .5" Mounting Hole (4 places)



Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.

