

TTH SERIES

MANUAL TRANSFER PANELS

The Panel/Link TTH includes a 200A utility main breaker and a 30A - 125A generator breaker. The circuit breakers are interlinked to keep the generator isolated from the utility at all times, even with the deadfront removed. The TTH features a heavy-duty copper bus. The TTH is designed as a stand-alone, generator-ready load center and is suitable for service entrance. Available in indoor and outdoor enclosures, the TTH has provision for 16/32 branch circuits. Power Inlet not included.



200AMP



30AMP - 125AMP



TTH - Indoor



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TTH2003C	200	30	No	Yes	8-15181-01533-6
TTH2003D	200	30	No	No	8-15181-01534-3
TTH2005C	200	50	No	Yes	8-15181-01536-7
TTH2005D	200	50	No	No	8-15181-01537-4
TTH2006C	200	60	No	Yes	8-15181-01539-8
TTH2006D	200	60	No	No	8-15181-01540-4
TTH2010D	200	100	No	No	8-15181-01542-8
TTH2012D	200	125	No	No	8-15181-01544-2


Dimensions: 30"h x 14.38"w x 3.94"d

2-POLE PANEL/LINK

TRANSFER PANELS



TTH - Outdoor




NEMA 3R
Rated

Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TTH2003DR	200	30	No	No	8-15181-01535-0
TTH2005DR	200	50	No	No	8-15181-01538-1
TTH2006DR	200	60	No	No	8-15181-01541-1
TTH2010DR	200	100	No	No	8-15181-01543-5
TTH2012DR	200	125	No	No	8-15181-01545-9


Dimensions: 33"h x 14.38"w x 3.94"d

TTH Series Knockout Patterns

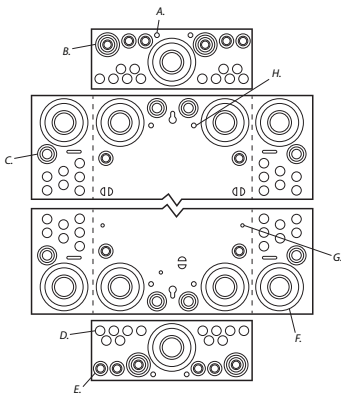

Indoor TTH Series


- A. 4 K.O.s for .25" Conduit
- B. 2 K.O.s for .38", .5", .75", 1", 1.25" Conduit
- C. 10 K.O.s for .5", .75", 1" Conduit
- D. 52 K.O.s for .5" Conduit
- E. 12 K.O.s for .38", .5", .75", Conduit
- F. 10 K.O.s for 1", 1.25", 2", 2.5" Conduit
- G. 3 K.O.s for 1.75" Ground Bar Mounting
- H. Mounting Hole (4 places)



Outdoor TTH Series

- A. HS Type Hub Opening (Max. 2.5" Conduit)
- B. 1 K.O.s for 1", 1.25", 1.5", 2", 2.5" Conduit
- C. 4 K.O.s for 5", .75", 1" Conduit
- D. 12 K.O.s for .5", .75" Conduit
- E. 1 K.O. .25"
- F. 3 K.O.s for .5" Conduit
- G. 3 K.O.s for 1.5", 2", 2.5" Conduit
- H. Embossed .5" Mounting Hole (4 places)

TTH Series Wiring Diagram

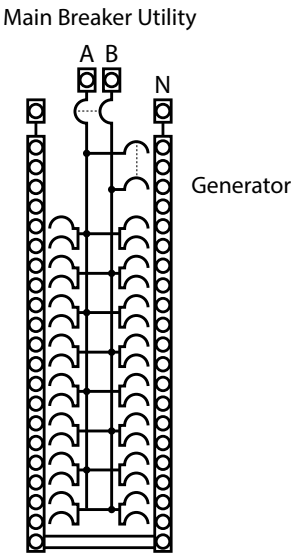

Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.

