

TTV SERIES

MANUAL TRANSFER PANELS

The **Panel/Link TTV** includes a 150A - 200A main circuit breaker interlinked and a 30A - 125A generator circuit breaker. The interlinked circuit breakers keep the generator isolated from the utility at all times, even with the cover or deadfront removed. The TTV features a heavy-duty copper bus. The TTV is suitable for service entrance and provides for 36 branch circuits. Dual wattmeters, for balancing generator load, are optional.



UTILITY

150AMP - 200AMP



GENERATOR

30AMP - 125AMP



TTV - Indoor



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TTV1503C	150	30	No	Yes	8-15181-01634-0
TTV1503D	150	30	No	No	8-15181-01554-1
TTV1505C	150	50	No	Yes	8-15181-01553-4
TTV1505D	150	50	No	No	8-15181-01554-1
TTV2003C	200	30	No	Yes	8-15181-01030-0
TTV2003D	200	30	No	No	8-15181-01557-2
TTV2005C	200	50	No	Yes	8-15181-01069-0
TTV2005D	200	50	No	No	8-15181-01562-6
TTV2006C	200	60	No	Yes	8-51890-00080-5
TTV2006D	200	60	No	No	8-15181-01029-4
TTV2010D	200	100	No	No	8-15181-01034-8
TTV2012D	200	125	No	No	8-15181-01573-2

Dimensions: 39"h x 14.38"w x 3.94"d

Shipping Weight: 45lbs.

2-POLE PANEL/LINK

TRANSFER PANELS

2-Pole Panel/Link Transfer Panels



TTV - Outdoor




NEMA 3R
Rated

Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TTV1505DR	150	50	No	No	8-15181-01555-8
TTV2003DR	200	30	No	No	8-15181-01559-6
TTV2005DR	200	50	No	No	8-15181-01564-0
TTV2006DR	200	60	No	No	8-15181-01568-8
TTV2010DR	200	100	No	No	8-15181-01571-8
TTV2012DR	200	125	No	No	8-15181-01575-6


Dimensions: 40"h x 14.25"w x 4.5"d Shipping Weight: 45lbs.

TTV Series Knockout Patterns

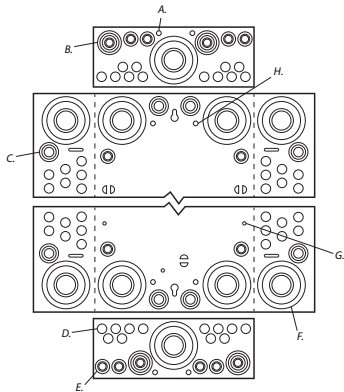

Indoor TTV Series


- A. 4 K.O.s for .25" Conduit
- B. 2 K.O.s for .38", .5", .75", 1", 1.25" Conduit
- C. 10 K.O.s for .5", .75", 1" Conduit
- D. 52 K.O.s for .5" Conduit
- E. 12 K.O.s for .38", .5", .75", Conduit
- F. 10 K.O.s for 1", 1.25", 2", 2.5" Conduit
- G. 3 K.O.s for 1.75" Ground Bar Mounting
- H. Mounting Hole (4 places)



Outdoor TTV Series

- A. HS Type Hub Opening (Max. 2.5" Conduit)
- B. 1 K.O.s for 1", 1.25", 1.5", 2", 2.5" Conduit
- C. 4 K.O.s for 5", .75", 1" Conduit
- D. 12 K.O.s for .5", .75" Conduit
- E. 1 K.O. .25"
- F. 3 K.O.s for .5" Conduit
- G. 3 K.O.s for 1.5", 2", 2.5" Conduit
- H. Embossed .5" Mounting Hole (4 places)

TTV Series Wiring Diagram

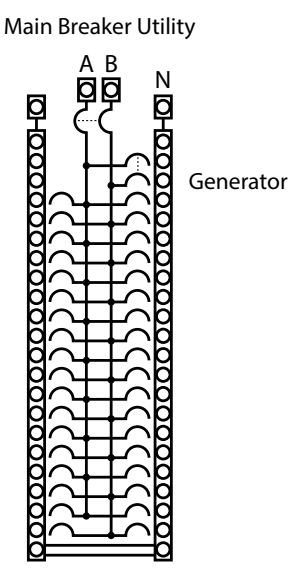

Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.

