

TRK SERIES

MANUAL TRANSFER PANELS

The Panel/Link TRK offers circuit breaker combinations of 30A - 100A utility and 30A - 60A generator. Interlinked circuit breakers keep the generator isolated from the utility at all times, even with the deadfront removed. The TRK features a heavy-duty copper bus. The TRK is available in indoor and outdoor enclosures and has provision for 12 branch circuits.



30AMP - 100AMP



30AMP - 60AMP



TRK - Indoor



Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TRK0303C	30	30	No	Yes	8-15181-01645-6
TRK0303D	30	30	No	No	8-15181-01646-3
TRK0503C	50	30	No	Yes	8-15181-01647-0
TRK0503D	50	30	No	No	8-15181-01648-7
TRK0505C	50	50	No	Yes	8-15181-01649-4
TRK0505D	50	50	No	No	8-15181-01650-0
TRK0603C	60	30	No	Yes	8-15181-01506-0
TRK0603D	60	30	No	No	8-15181-01651-7
TRK0605C	60	50	No	Yes	8-15181-01652-4
TRK0605D	60	50	No	No	8-15181-01653-1
TRK0606C	60	60	No	Yes	8-15181-01730-9
TRK0606D	60	60	No	No	8-15181-01654-8
TRK1003C	100	30	No	Yes	8-15181-01655-5
TRK1003D	100	30	No	No	8-15181-01656-2
TRK1005C	100	50	No	Yes	8-15181-01657-9
TRK1005D	100	50	No	No	8-15181-01658-6
TRK1006C	100	60	No	Yes	8-15181-01731-6
TRK1006D	100	60	No	No	8-15181-01659-3

Dimensions: 15.75"h x 12.38"w x 3.38"d

2-POLE PANEL/LINK

TRANSFER PANELS

2-Pole Panel/Link Transfer Panels



TRK - Outdoor




NEMA 3R
Rated

Model#	Max. Utility Input Amps	Max. Gen. Input Amps	Gen. Power Inlet Included	Watt Meters Included	UPC
TRK0303DR	30	30	No	No	8-15181-01660-9
TRK0503DR	50	30	No	No	8-15181-01661-6
TRK0505DR	50	50	No	No	8-15181-01662-3
TRK0603DR	60	30	No	No	8-15181-01663-0
TRK0606DR	60	60	No	No	8-15181-01664-7
TRK1003DR	100	30	No	No	8-15181-01665-4
TRK1005DR	100	50	No	No	8-15181-01666-1
TRK1006DR	100	60	No	No	8-15181-01667-8


Dimensions: 18"h x 12.5"w x 5"d

TRK Series Knockout Patterns

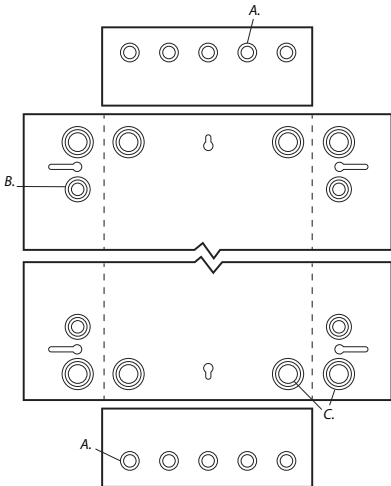

Indoor TRK Series


- A. 10 K.O.s for .5", .75" Conduit
- B. 4 K.O.s for .5", .75", 1" Conduit
- C. 4 K.O.s for .75", 1", 1.25" Conduit

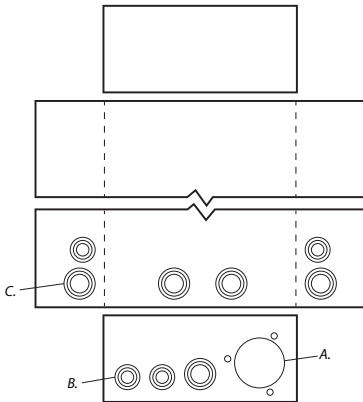

Outdoor TRK Series

- A. Opening for RCC Flanged Inlets
- B. 4 K.O.s for 5", .75", 1" Conduit
- C. 5 K.O.s for .75", 1", 1.25" Conduit

TRK Series Wiring Diagram

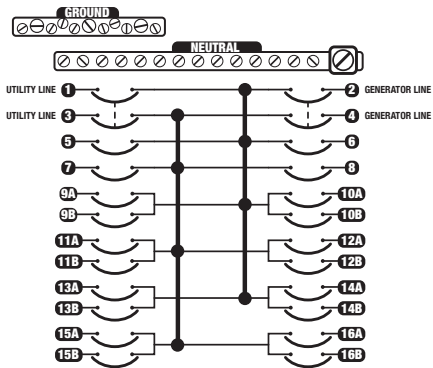

Above models are UL listed for the following branch circuit breakers: Siemens Type QP, QT, QPH, HQP, QPH, QPHF, QFP, QE, QEH; Square D Series HOM 100A Max. Murry Type MP; C-H/Westinghouse Series BD, BR, BQ, GFC 100A Max.

